


Peelable Coating™



◀ Glass

Bath Tub ▶



◀ Stainless Steel Sink

Flooring ▶



HOME CARE AGENCY™

Peelable CoatingTM

Complete Line of temporary protective **Peelable Coating[®]** to provide temporary masking, protection, decoration or long term preservation. Which is available in Solvent & Water based in liquid form. Applied as a liquid by spray, roller or brush, these coatings dry to form a skin-tight plastic film which can simply be peeled away when required, without damage to surface.

Use: – **Peelable Coating[®]** which will form a skin tight protective film (Water Resistant). It is designed to be used on non-porous various surfaces like Stainless Steel, Aluminium, Selected Plastics, FRP, Glass, Polished Stones etc. It can be easily peeled off when desired. It can be used as a Maskant.

Colour: – It is supplied in Green & Blue colour. It can be supplied in transparent form also & any colour can be given on request.

Health & Safety: – Protect your skin & eyes while application use plenty of water in case of irritation to eyes & skin and consult to doctor immediately.

Application: – **Peelable Coating[®]** is a Sprayable & Brushable Grade. SHAKE WELL BEFORE USE. Do not add any diluents / Spray gun should not contain residues of Oil, Lacquer & grease. Clean thoroughly with thinner. Spray the material with a pressure of 70 - 120 psi on the surface in a uniform coating. It can be recoated 2 or 3 times in the wet condition to obtain a thicker dry coating. Allow coating to dry in a stream of hot/cold air. Sunlight or hot air can be used in enhancing the drying process.

Drying Time: – Approx. drying time is 45 to 60 mins depending on thickness of coating & ambient temp. Cured Film can be peeled off after 12 to 24 hrs depending on external ambient temp.

Repair: – If the dry film is ripped then it can be lifted and resealed by application of a fresh wet coat to the patch. It will rejoin and bond into the original film by itself.


Removal: – Easily stripped away by hand when required. We do not recommend removing in freezing conditions as the coating will be brittle.

Coverage: – 1 kg of material will approx. cover 100-150 sq. ft. of area at a dry film thickness of 50 to 100 microns. We recommend a minimum 120 micron DFT for easy film removal.

Cleaning: – All spray equipment, brushes or rollers should be washed with thinner immediately after use.

Storage: – Shelf life is 6 months from mfg date. Do not allow liquid to freeze. Store between 10°C to 30°C. Store in a cool and dry place away from sunlight.

General note: – It is important that the product is thoroughly evaluated under production conditions before being commercially adopted (such an evaluation should incorporate a reference to ageing). The above recommendations are made in good faith for the guidance of users and are without liability. Any queries should be referred to our technical department.

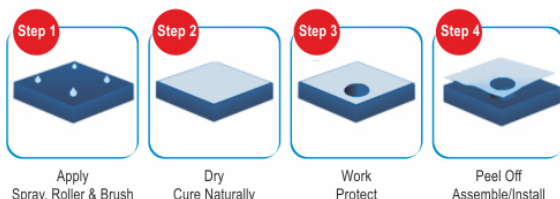

Caution: Test on a small piece before application on non-porous surfaces only.



HOME CARE AGENCYTM

12-H, Opp. Traffic Kotwali
Daryaganj Delhi 110002
INDIA

Tel 91-11-23282718, 23251975
91-9650847575
91-9810172216

Fax 91-11-23251975

Email: sales@apkaHomeCare.com
www.apkaHomeCare.com

Disclaimer

This leaflet contains information based on results gained from tests and experiences and are hereby given in good faith. The recommendations and suggestions are without any obligation as the conditions of use and workmanship are beyond our control. We assure the quality of our product is good.